

QUICK START GUIDE

52C2, 61C5 SERIES



TOTAL FLOORS®
MULTI SURFACE | MULTI CYCLONIC
COMPLETE

 **TOTAL FLOORS®**
MULTI SURFACE | MULTI CYCLONIC

pet



WARNING: Refer to the enclosed user's guide for complete instructions and important safety notices.

YOUR TOTAL FLOORS® VACUUM COMES WITH THE FOLLOWING COMPONENTS:



A) VACUUM BASE



B) UPPER HANDLE



C) CARRY HANDLE



D) FEBREZE® FILTER



E) FOAM FILTER



F) TOOL STORAGE CLIP



G) HOSE GUIDE CLIP



H) HOSE GUIDE/
TOOL CADDY



I) TURBOBRUSH
(select models)



J) PET TURBOERASER
(select models)



K) LONG REACH
DUSTING TOOL
(select models)



L) PET HAIR FABRIC TOOL
(select models)



M) DUSTING BRUSH/
UPHOLSTERY TOOL



N) EXTENSION WAND



O) EDGE CLEAN/
CREVICE TOOL



P) TWIST N' SNAP HOSE

Filter Assembly

Your Total Floors® vacuum comes with a preinstalled Foam Filter (E). Before assembling and using your vacuum, ensure that the Foam Filter or Febreze® Filter (D) is installed. See page 5 of your user's guide for more information.

Scan the code to view a short assembly video.





Handle Assembly

1. Slide the Upper Handle (B) onto the back of the Vacuum Base (A).
2. Locate the screw packet taped to the Carry Handle (C). Guide the Carry Handle into place onto the back of the Upper Handle and insert two of the screws into the existing holes. Tighten screws securely with a Phillips screwdriver.

Tools and Hose Assembly

1. Attach the Tool Storage Clip (F) to the back of the handle by snapping the piece into the unit as shown. Push piece straight in—with the tool grips facing down—until it snaps into place.
2. Attach the Hose Guide Clip (G) to the left side of the back of the Vacuum Base. Insert tab at a 45 degree angle and turn clockwise so it snaps into place.
3. Attach the Hose Guide/Tool Caddy to the bottom of the vacuum base. Align the component with the appropriate grooves on the back of the unit. Slide into place and insert screw into the existing hole. Tighten securely with a Phillips screwdriver.
4. Place the TurboBrush Tool (I) or Pet TurboEraser Tool (J) into its holder from the front of the vacuum (above the Suction Power Indicator). Secure the Tool by snapping the tool into the Tool Storage Clip (F).
5. Mount the Extension Wand (N) and Pet Hair Fabric Tool (L) or Long Reach Dusting Tool (K) to the back of the unit as shown on page 4 of your user's guide.
6. Line up the tabs of the Twist n' Snap Hose (P) with the corresponding notches and turn clockwise. Slide the end of the hose into the Hose Wand Base and wrap around the Hose Guides as shown on page 4 of your user's guide.

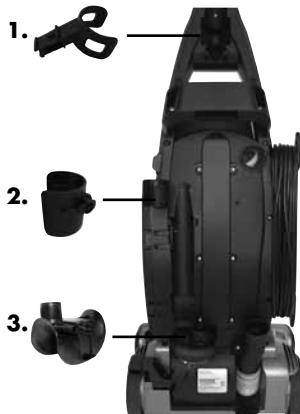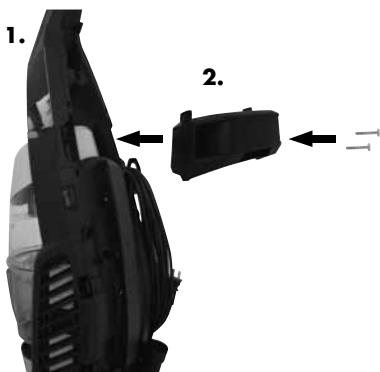

For information about repairs or replacement parts, or questions about your warranty, call:

BISSELL Consumer Care
1-800-237-7691

Or visit the BISSELL website: www.bissell.com



©2012 BISSELL Homecare, Inc
Grand Rapids, Michigan
All rights reserved.
Printed in Vietnam
Part Number 110-4564
Rev 5/12
Visit our website at:
www.bissell.com